

# AC 825

Cummins  
Mecc Alte  
D+ &



<b>ISO8528</b>	GC ; ) &
<b>SZUTEST</b>	GC - \$\$\$
<b>CE</b>	

2000/14/EC & \$\$\$#( #  
z) \$ z' z' D:

	kw	Amp
400/230	825,00	660,00
		0,00

fP GDE GC ; ) &  
) & z fDF D% \$! % %& GC " \$(\* z& GC

Standard Specifications

z  
fi ! E  
z

1

ALTERNATOR  
fi ! E  
fi " E  
f) \$\$\$ \$\$\$ E

2

TRANSFER SWITCH  
fi ! E

# AC 825

Cummins  
Mecc Alte  
D+' &''

Manufacturer		Cummins		
Model		VTA 28 G6		
		% \$ \$' "# "		
		722,00 kw [968,00HP]		
	L	28,000		
	"	140 x 152		
		13,1:1		
	fl # 7	"# "	1500	
	fl 7	L	83,00	
		L	170,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	54,84		
	' # "	651,00		
	' # "	132,72		
	° C	489,00		
		24 V d.c.		
	Load	% \$ \$i	'+) i	) \$i
	# "	163,60	133,00	91,00

		Mecc Alte		
		ECO40-VL/4		
	Hz	50		
	"	750,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	1084,00		

		fl 7		fl 7	
	"	"	"	"	L
AC 825	5610,00	3950,00	1550,00	2270,00	1000,00
		fl 7		fl 7	
	"	"	"	"	L
MS 85	7170	5297	1606	2656	1000



# AC 825

Cummins  
Mecc Alte  
D+ &

f@z@Bl  
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'\*\$-\$)

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

)  
&(\$)

ž

ž

ž

ž

%, !&\*(

"

"


"

"

"

# AC 825

Cummins  
Mecc Alte  
D+ & "

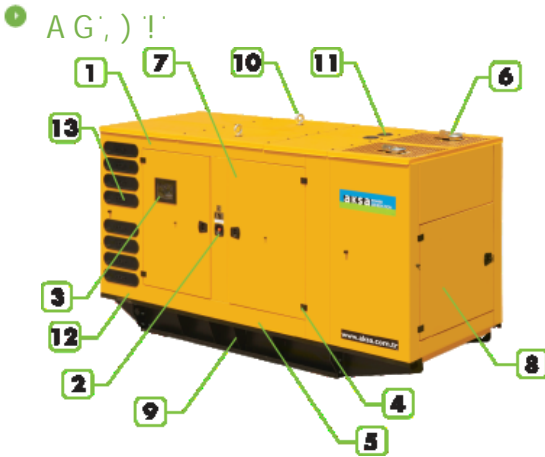

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000